

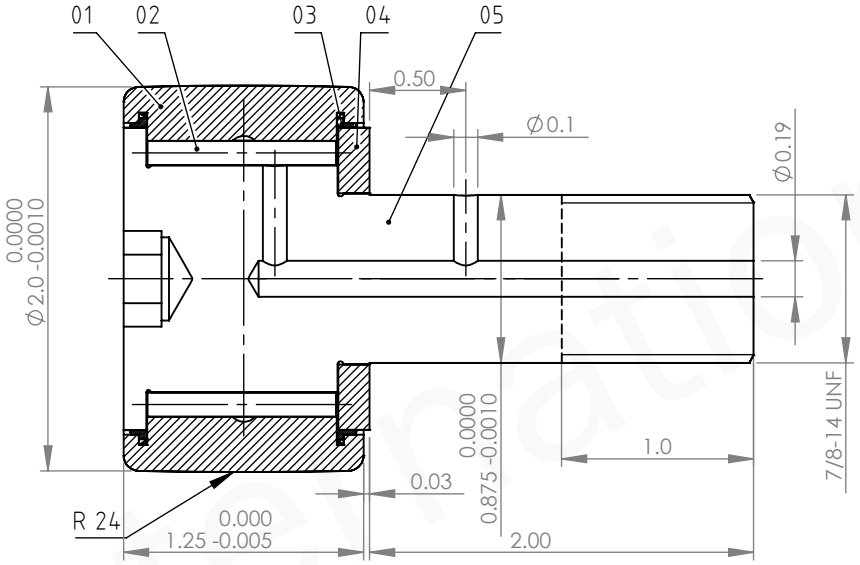

Number	Item	Quantity	Material	Heat	Remark
5	Shaft	1	20CrMo	58-62 HRC	
4	Retaining Washer	1	GCr15	50-55 HRC	
3	Seal	2	PA66		
2	Roller	29	GCr15	61-65 HRC	Ø3.19 x 25.3
1	Outer ring	1	20CrMo	58-62 HRC	

Notes:
1.Bearing must be clean,free of burrs,scratches and other foreign matters
2. Radial internal clearence 0.02~.045 mm
3. Dynamic load: 8090 LBS,static load: 10570 LBS
4.Bearing pre lubricated with EP-2 extreme pressure grease
5.Black oxide on external surfaces

Units are in Inches
ASME Y14.5
X.X ± 0.040
X.XX ± 0.015
X.XXX ± 0.005
X.XXXX ± 0.0005

Third Angle Projection

Passing on and copying of this document, use and Its contents is not permitted unless expressly permitted.Violators are liable for damages. All rights for the Case of patent award or utility model registration. (DIN34/ISO16016)

Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhalts nicht gestattet, soweit nicht ausdrücklich erlaubt. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patenterteilung oder Gebrauchsmuster-Eintragung vorbehalten. (DIN34/ISO16016)

	Date	Name
Drawn	2016/10/28	SD
Check	-	-
Aprv	-	-
Department		

Rev	ECN	Description	Date	Name
-	-	-	-	-
-	-	-	-	-
+	-	Initial Release	-	-

Made From: -

State: Approval Pending | QTY: | Scale: 1:1

Material: -

Finish: -

Hardness: - HRC

Name / Title: CAM FOLLOWER

Mat'l Dims: - CCF-2-SB

Description: -

Machine Name: - | Machine No: -

Tool Name: - | Tool No: -

Drawing Number: 0009201900 | Sheet Size ANSI A 1 of 1

SAP Part Number: -

Replacement for: - | Replaced by: -

osborn International